


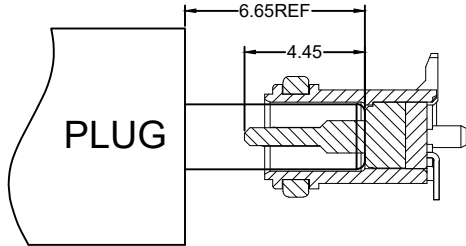
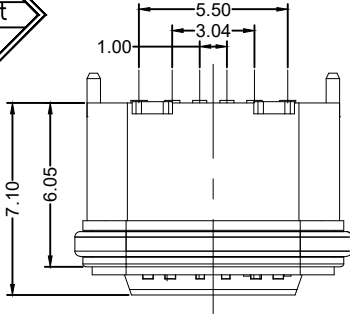
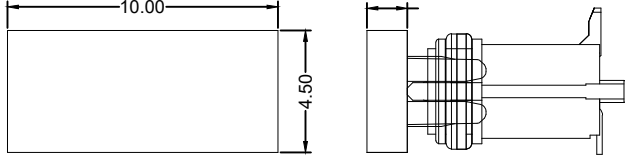



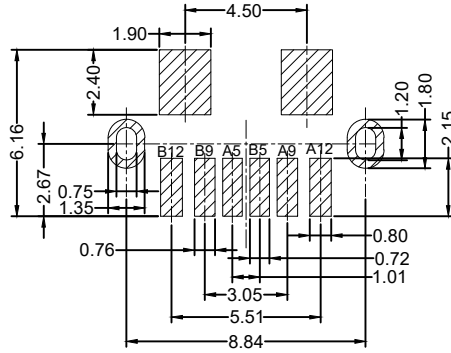




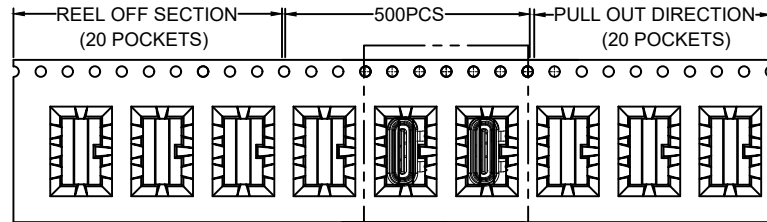


1		2		3		4		5		6																																																											
ROHS Compliant REACH  Cap dimensions 						REV	DESCRIPTION			DATE		APPROVED																																																									
						A	新板发行			2023. 05. 05		HHM																																																									
 RoHS Compliant 2002/95/EC						SPECIFICATION:																																																															
						1. CURRENT RATING: 3.0 A 2. VOLTAGE RATING: 5.0 V 3. VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX SHIELD: 50mΩ /MAX LLCR MAX. CHANGE OF ALL PINS: 10mΩ 4. INSULATION RESISTANCE: 100MΩ MIN 5. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1MINUTE 6. INSERTION FORCE: 0.5~2.0kgf 7. UNMATING FORCE: 0.8~2.0kgf 8. DURABILITY: 10000 CYCLES 9. OPERATING TEMPERATURE: -25° C~+85° C 10. THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C 11. WATERPROOF: IP67.																																																															
 RECOMMENDED PCB LAYOUT TOLERANCE:±0.05						<table><tr><td>A1</td><td>A2</td><td>A3</td><td>A4</td><td>A5</td><td>A6</td><td>A7</td><td>A8</td><td>A9</td><td>A10</td><td>A11</td><td>A12</td></tr><tr><td></td><td></td><td></td><td></td><td>CC1</td><td></td><td></td><td></td><td>VBUS</td><td></td><td></td><td>GND</td></tr><tr><td>B12</td><td>B11</td><td>B10</td><td>B9</td><td>B8</td><td>B7</td><td>B6</td><td>B5</td><td>B4</td><td>B3</td><td>B2</td><td>B1</td></tr><tr><td>GND</td><td></td><td></td><td>VBUS</td><td></td><td></td><td></td><td>CC2</td><td></td><td></td><td></td><td></td></tr></table>						A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12					CC1				VBUS			GND	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1	GND			VBUS				CC2														
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12																																																										
				CC1				VBUS			GND																																																										
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1																																																										
GND			VBUS				CC2																																																														
<table><tr><td>1</td><td>SHELL</td><td>ZN ALLOY</td><td>Ni PLATED</td></tr><tr><td>2</td><td>MID PLATE</td><td>STAINLESS STEEL</td><td>SUS304 NO PLATED</td></tr><tr><td>3</td><td>HOUSING</td><td>HIGH TEMPERATURE PLASTIC</td><td>LCP BLACK UL94V-0</td></tr><tr><td>4</td><td>CONTACT</td><td>COPPER ALLOY(C5191)</td><td>Au PLATING ON CONTACT AREA</td></tr><tr><td>5</td><td>RING</td><td>SILICON</td><td>RED</td></tr><tr><td>NO.</td><td>PARTS</td><td>MATERIAL</td><td>REMARKS</td></tr></table>						1	SHELL	ZN ALLOY	Ni PLATED	2	MID PLATE	STAINLESS STEEL	SUS304 NO PLATED	3	HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK UL94V-0	4	CONTACT	COPPER ALLOY(C5191)	Au PLATING ON CONTACT AREA	5	RING	SILICON	RED	NO.	PARTS	MATERIAL	REMARKS	<table><tr><td colspan="3">CUSTOMER DRAWING</td><td colspan="3">铭创科技（东莞）有限公司</td></tr><tr><td colspan="2">UNITS mm</td><td>SCALE 1:1</td><td colspan="2">SHEET 1 OF 2</td><td colspan="2">Mingchuang Technology (Dongguan) Co., Ltd</td></tr><tr><td colspan="2">PROJECTION: </td><td colspan="2">DRAW: DAP</td><td colspan="3">TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=7.1 舌片外露 带贴板脚 锌合金 IPX7</td></tr><tr><td colspan="2">GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°</td><td colspan="2">CHECK: HWT</td><td colspan="2">MAT'L SEE TABLE</td><td>FINISH SEE TABLE</td></tr><tr><td colspan="2"></td><td colspan="2">APPD: HHM</td><td colspan="2">DWG. NO. A04W0601A</td><td>PART NO. _____ SIZE A4</td></tr></table>						CUSTOMER DRAWING			铭创科技（东莞）有限公司			UNITS mm		SCALE 1:1	SHEET 1 OF 2		Mingchuang Technology (Dongguan) Co., Ltd		PROJECTION: 		DRAW: DAP		TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=7.1 舌片外露 带贴板脚 锌合金 IPX7			GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		CHECK: HWT		MAT'L SEE TABLE		FINISH SEE TABLE			APPD: HHM		DWG. NO. A04W0601A		PART NO. _____ SIZE A4
1	SHELL	ZN ALLOY	Ni PLATED																																																																		
2	MID PLATE	STAINLESS STEEL	SUS304 NO PLATED																																																																		
3	HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK UL94V-0																																																																		
4	CONTACT	COPPER ALLOY(C5191)	Au PLATING ON CONTACT AREA																																																																		
5	RING	SILICON	RED																																																																		
NO.	PARTS	MATERIAL	REMARKS																																																																		
CUSTOMER DRAWING			铭创科技（东莞）有限公司																																																																		
UNITS mm		SCALE 1:1	SHEET 1 OF 2		Mingchuang Technology (Dongguan) Co., Ltd																																																																
PROJECTION: 		DRAW: DAP		TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=7.1 舌片外露 带贴板脚 锌合金 IPX7																																																																	
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		CHECK: HWT		MAT'L SEE TABLE		FINISH SEE TABLE																																																															
		APPD: HHM		DWG. NO. A04W0601A		PART NO. _____ SIZE A4																																																															
1		2		3		4		5		6																																																											

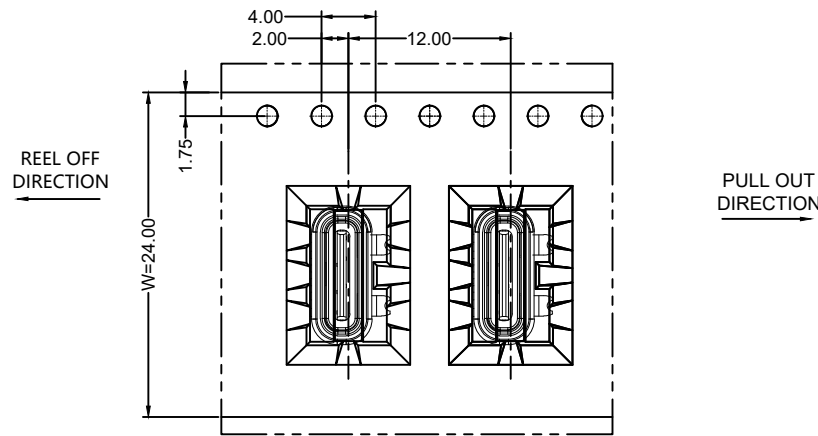


SEE DETAIL X

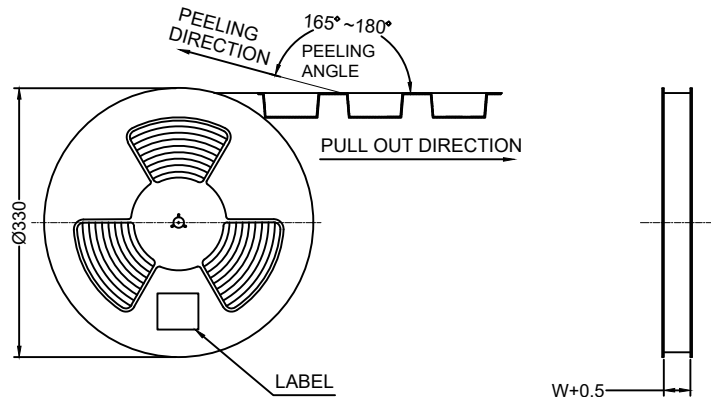

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023. 05. 05	HHM

	REEL	CARTON
CONNECTOR (PCS)	500	3500

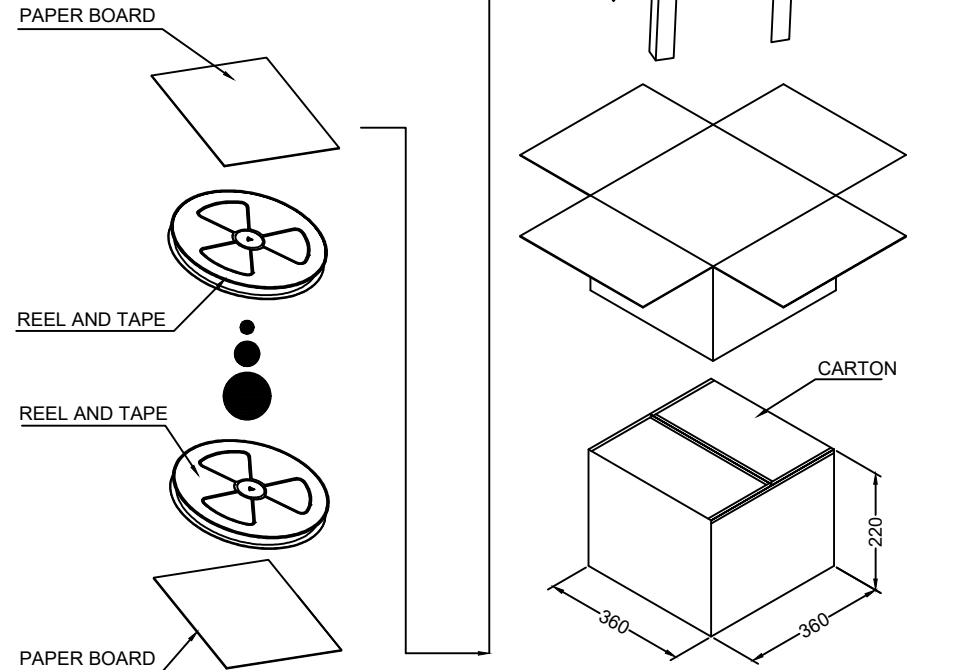

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 2 OF 2	Mingchuang Technology (Dongguan) Co., Ltd		
PROJECTION: 	DRAW: DAP		TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=7.1 舌片外露 带贴板脚 锌合金 IPX7		
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°	CHECK: HWT		MAT'L SEE TABLE	FINISH SEE TABLE	
	APPD: HHM		DWG. NO. A04W0601A	PART NO. _____	SIZE A4