

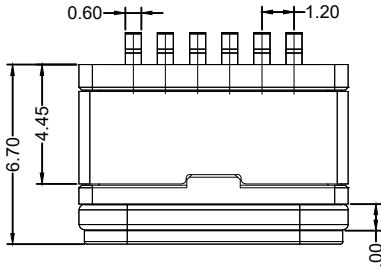


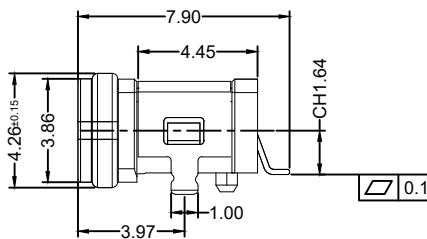
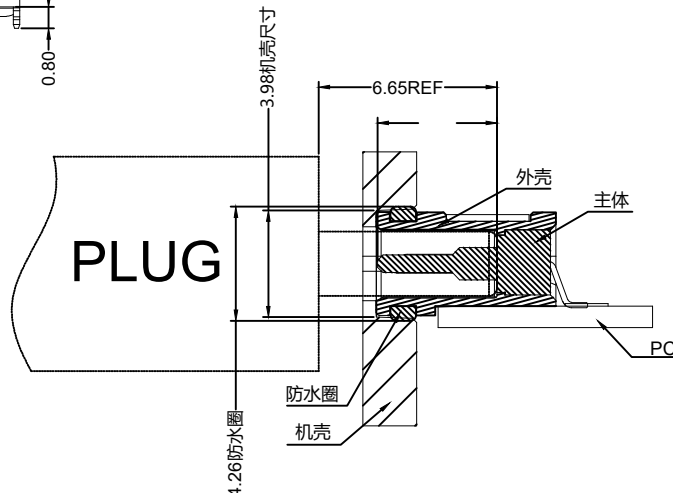



1		2		3		4		5		6																																																																																																																																																																																																																			
ROHS Compliant REACH  		REV		DESCRIPTION		DATE		APPROVED																																																																																																																																																																																																																					
		A		新板发行		2023. 05. 05		HHM																																																																																																																																																																																																																					
  		SPECIFICATION: 1.CURRENT RATING: 3.0 A 2.VOLTAGE RATING: 5.0 V 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX SHIELD: 50mΩ/MAX LLCR MAX. CHANGE OF ALL PINS: 10mΩ 4.INSULATION RESISTANCE: 100MΩ MIN 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE 6.INSERTION FORCE: 0.5~2.0kgf 7.UNMATING FORCE: 0.8-2.0kgf 8.DURABILITY: 10000 CYCLES 9.OPERATING TEMPERATURE: -25℃~+85℃ 10.THE PEAK TEMPERATURE ON THE BOARO SHALL BE MAINTAINED FOR 10 SECONDS AT 260℃ 11. WATERPROOF:IP67.																																																																																																																																																																																																																											
<table><tr><td>A1</td><td>A2</td><td>A3</td><td>A4</td><td>A5</td><td>A6</td><td>A7</td><td>A8</td><td>A9</td><td>A10</td><td>A11</td><td>A12</td></tr><tr><td></td><td></td><td></td><td></td><td>CC1</td><td></td><td></td><td></td><td>VBUS</td><td></td><td></td><td>GND</td></tr><tr><td>B12</td><td>B11</td><td>B10</td><td>B9</td><td>B8</td><td>B7</td><td>B6</td><td>B5</td><td>B4</td><td>B3</td><td>B2</td><td>B1</td></tr><tr><td>GND</td><td></td><td></td><td></td><td>VBUS</td><td></td><td></td><td></td><td>CC2</td><td></td><td></td><td></td></tr><tr><td>1</td><td colspan="2">SHELL</td><td colspan="4">HIGH TEMPERATURE PLASTIC</td><td colspan="5">PA46 BLACK UL94V-0</td></tr><tr><td>2</td><td colspan="2">MID PLATE</td><td colspan="4">STAINLESS STEEL</td><td colspan="5">SUS304 NO PLATED</td></tr><tr><td>3</td><td colspan="2">HOUSING</td><td colspan="4">HIGH TEMPERATURE PLASTIC</td><td colspan="5">LCP BLACK UL94V-0</td></tr><tr><td>4</td><td colspan="2">CONTACT</td><td colspan="4">COPPER ALLOY(C5191)</td><td colspan="5">Au PLATING ON CONTACT AREA</td></tr><tr><td>5</td><td colspan="2">RING</td><td colspan="4">SILICON</td><td colspan="5">RED</td></tr><tr><td>6</td><td colspan="2">OUT SHELL</td><td colspan="4">STAINLESS STEEL</td><td colspan="5">SUS304 NI PLATED</td></tr><tr><td>NO.</td><td colspan="2">PARTS</td><td colspan="4">MATERIAL</td><td colspan="5">REMARKS</td></tr></table>		A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12					CC1				VBUS			GND	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1	GND				VBUS				CC2				1	SHELL		HIGH TEMPERATURE PLASTIC				PA46 BLACK UL94V-0					2	MID PLATE		STAINLESS STEEL				SUS304 NO PLATED					3	HOUSING		HIGH TEMPERATURE PLASTIC				LCP BLACK UL94V-0					4	CONTACT		COPPER ALLOY(C5191)				Au PLATING ON CONTACT AREA					5	RING		SILICON				RED					6	OUT SHELL		STAINLESS STEEL				SUS304 NI PLATED					NO.	PARTS		MATERIAL				REMARKS					RECOMMENDED PCB LAYOUT TOLERANCE:±0.05 RoHS Compliant 2002/95/EC		<table><tr><td colspan="3">CUSTOMER DRAWING</td><td colspan="3">铭创科技（东莞）有限公司</td></tr><tr><td colspan="2">UNITS</td><td>SCALE</td><td colspan="3">Mingchuang Technology (Dongguan) Co., Ltd</td></tr><tr><td colspan="2">mm</td><td>1:1</td><td colspan="3">TITLE</td></tr><tr><td colspan="2">PROJECTION:</td><td>DRAW:</td><td colspan="3">防水TYPE C母座6PIN 板上两脚插板SMT</td></tr><tr><td colspan="2">GENERAL</td><td>CHECK:</td><td colspan="3">L=6.7 全塑半包型 IP67</td></tr><tr><td colspan="2">TOLERANCE</td><td>APPD:</td><td colspan="3">MAT'L</td></tr><tr><td colspan="2">.000 ±0.02</td><td>HWT</td><td colspan="3">SEE TABLE</td></tr><tr><td colspan="2">.00 ±0.10</td><td>HHM</td><td colspan="3">FINISH</td></tr><tr><td colspan="2">.0 ±0.20</td><td></td><td colspan="3">SEE TABLE</td></tr><tr><td colspan="2">.0 ±2°</td><td></td><td colspan="3">DWG. NO.</td></tr><tr><td colspan="2">.00 ±1°</td><td></td><td colspan="3">A04W0604A</td></tr><tr><td colspan="2"></td><td></td><td colspan="3">PART NO.</td></tr><tr><td colspan="2"></td><td></td><td colspan="3">SIZE</td></tr><tr><td colspan="2"></td><td></td><td colspan="3">A4</td></tr></table>		CUSTOMER DRAWING			铭创科技（东莞）有限公司			UNITS		SCALE	Mingchuang Technology (Dongguan) Co., Ltd			mm		1:1	TITLE			PROJECTION:		DRAW:	防水TYPE C母座6PIN 板上两脚插板SMT			GENERAL		CHECK:	L=6.7 全塑半包型 IP67			TOLERANCE		APPD:	MAT'L			.000 ±0.02		HWT	SEE TABLE			.00 ±0.10		HHM	FINISH			.0 ±0.20			SEE TABLE			.0 ±2°			DWG. NO.			.00 ±1°			A04W0604A						PART NO.						SIZE						A4		
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12																																																																																																																																																																																																																		
				CC1				VBUS			GND																																																																																																																																																																																																																		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1																																																																																																																																																																																																																		
GND				VBUS				CC2																																																																																																																																																																																																																					
1	SHELL		HIGH TEMPERATURE PLASTIC				PA46 BLACK UL94V-0																																																																																																																																																																																																																						
2	MID PLATE		STAINLESS STEEL				SUS304 NO PLATED																																																																																																																																																																																																																						
3	HOUSING		HIGH TEMPERATURE PLASTIC				LCP BLACK UL94V-0																																																																																																																																																																																																																						
4	CONTACT		COPPER ALLOY(C5191)				Au PLATING ON CONTACT AREA																																																																																																																																																																																																																						
5	RING		SILICON				RED																																																																																																																																																																																																																						
6	OUT SHELL		STAINLESS STEEL				SUS304 NI PLATED																																																																																																																																																																																																																						
NO.	PARTS		MATERIAL				REMARKS																																																																																																																																																																																																																						
CUSTOMER DRAWING			铭创科技（东莞）有限公司																																																																																																																																																																																																																										
UNITS		SCALE	Mingchuang Technology (Dongguan) Co., Ltd																																																																																																																																																																																																																										
mm		1:1	TITLE																																																																																																																																																																																																																										
PROJECTION:		DRAW:	防水TYPE C母座6PIN 板上两脚插板SMT																																																																																																																																																																																																																										
GENERAL		CHECK:	L=6.7 全塑半包型 IP67																																																																																																																																																																																																																										
TOLERANCE		APPD:	MAT'L																																																																																																																																																																																																																										
.000 ±0.02		HWT	SEE TABLE																																																																																																																																																																																																																										
.00 ±0.10		HHM	FINISH																																																																																																																																																																																																																										
.0 ±0.20			SEE TABLE																																																																																																																																																																																																																										
.0 ±2°			DWG. NO.																																																																																																																																																																																																																										
.00 ±1°			A04W0604A																																																																																																																																																																																																																										
			PART NO.																																																																																																																																																																																																																										
			SIZE																																																																																																																																																																																																																										
			A4																																																																																																																																																																																																																										
1		2		3		4		5		6																																																																																																																																																																																																																			

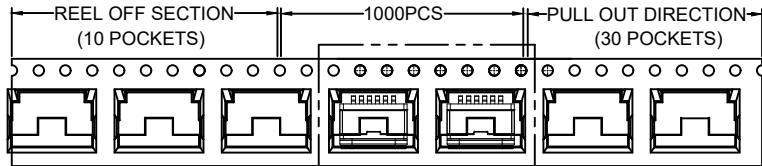

SEE DETAIL X

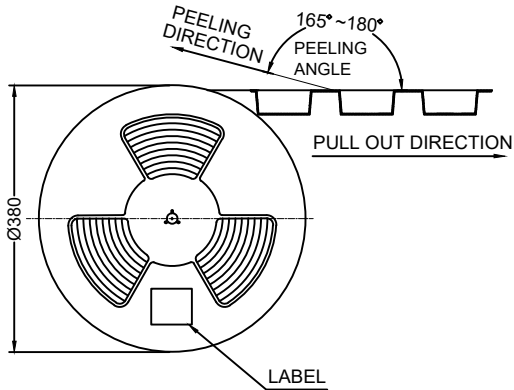


W+0.5

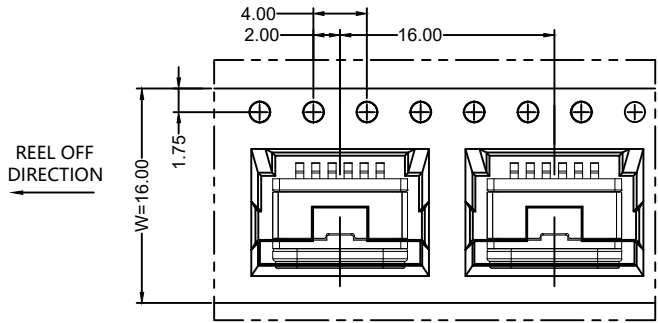

DETAIL X

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023.05.05	HHM

	REEL	CARTON
CONNECTOR (PCS)	1000	10000

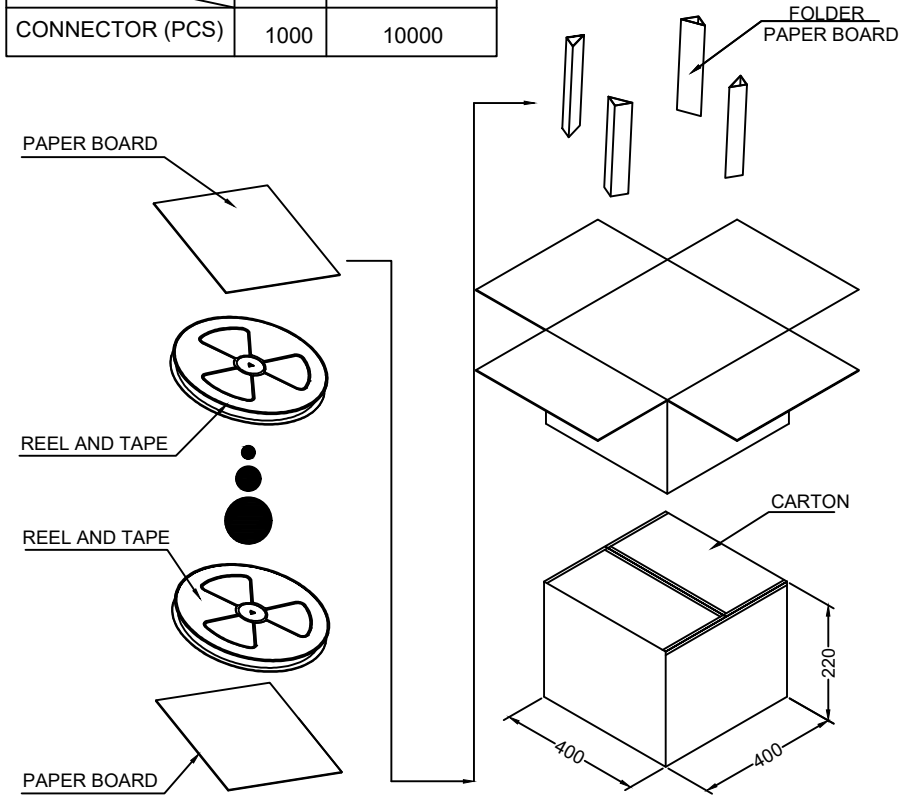

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm		SCALE 1:1	Mingchuang Technology (Dongguan) Co., Ltd		
PROJECTION: 		SHEET 2 OF 2	TITLE 防水TYPE C母座6PIN 板上两脚插板SMT L=6.7 全塑半包型 IP67		
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		DRAW: DAP	MAT'L SEE TABLE		
		CHECK: HWT	FINISH SEE TABLE		
		APPD: HHM	DWG. NO. A04W0604A	PART NO. _____	SIZE A4