

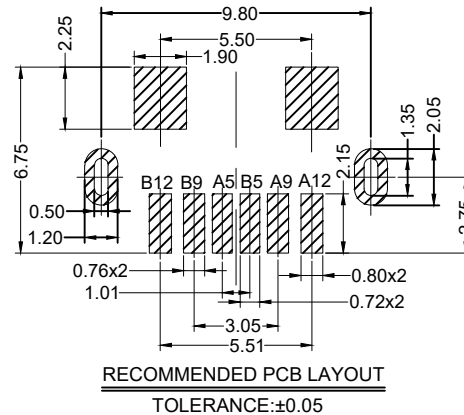









SPECIFICATION:

1. CURRENT RATING: 3.0 A
2. VOLTAGE RATING: 5.0 V
3. VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX
SHIELD: 50mΩ /MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
4. INSULATION RESISTANCE: 100MΩ MIN
5. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1MINUTE
6. INSERTION FORCE: 0.5~2.0kgf
7. UNMATING FORCE: 0.8~2.0kgf
8. DURABILITY: 10000 CYCLES
9. OPERATING TEMPERATURE: -25° C~+85° C
10. THE PEAK TEMPERATURE ON THE BOARO SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C
11. WATERPROOF: IP67.

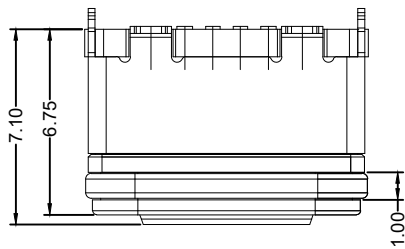

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
				CC1				VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND			VBUS				CC2				

1	SHELL	HIGH TEMPERATURE PLASTIC	PA46 BLACK UL94V-0
2	MID PLATE	STAINLESS STEEL	SUS304 NO PLATED
3	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T BLACK UL94V-0
4	CONTACT	COPPER ALLOY(C5191)	Au PLATING ON CONTACT AREA
5	RING	SILICON	RED
6	OUT SHELL	STAINLESS STEEL	SUS304 NI PLATED
NO.	PARTS	MATERIAL	REMARKS

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm		SCALE 1:1	Mingchuang Technology (Dongguan) Co., Ltd		
PROJECTION: 		SHEET 1 OF 2	TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=6.8 带贴板脚 全塑 IPX7		
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		DRAW: DAP	MAT'L SEE TABLE		
CHECK: HWT		FINISH SEE TABLE		DWG. NO. A04W0606A	
APPD: HHM		PART NO. _____		SIZE A4	

1

2

3




4

5


6




注意事项：产品为防水产品，请在开封后8小时内用完

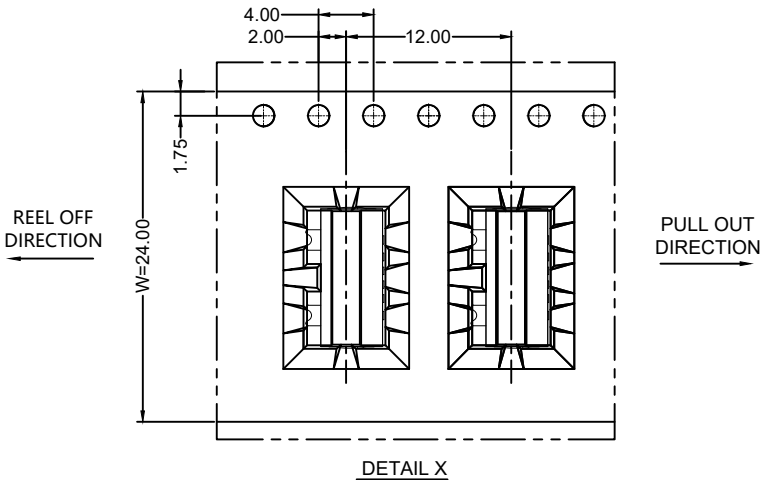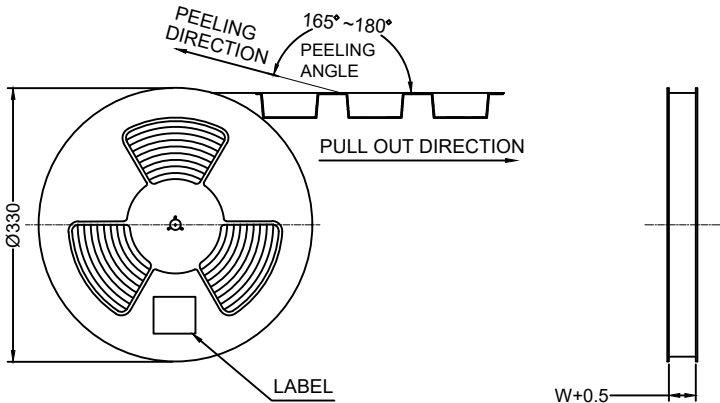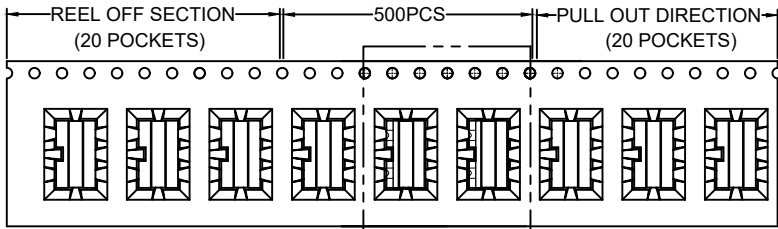

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023.05.05	HHM

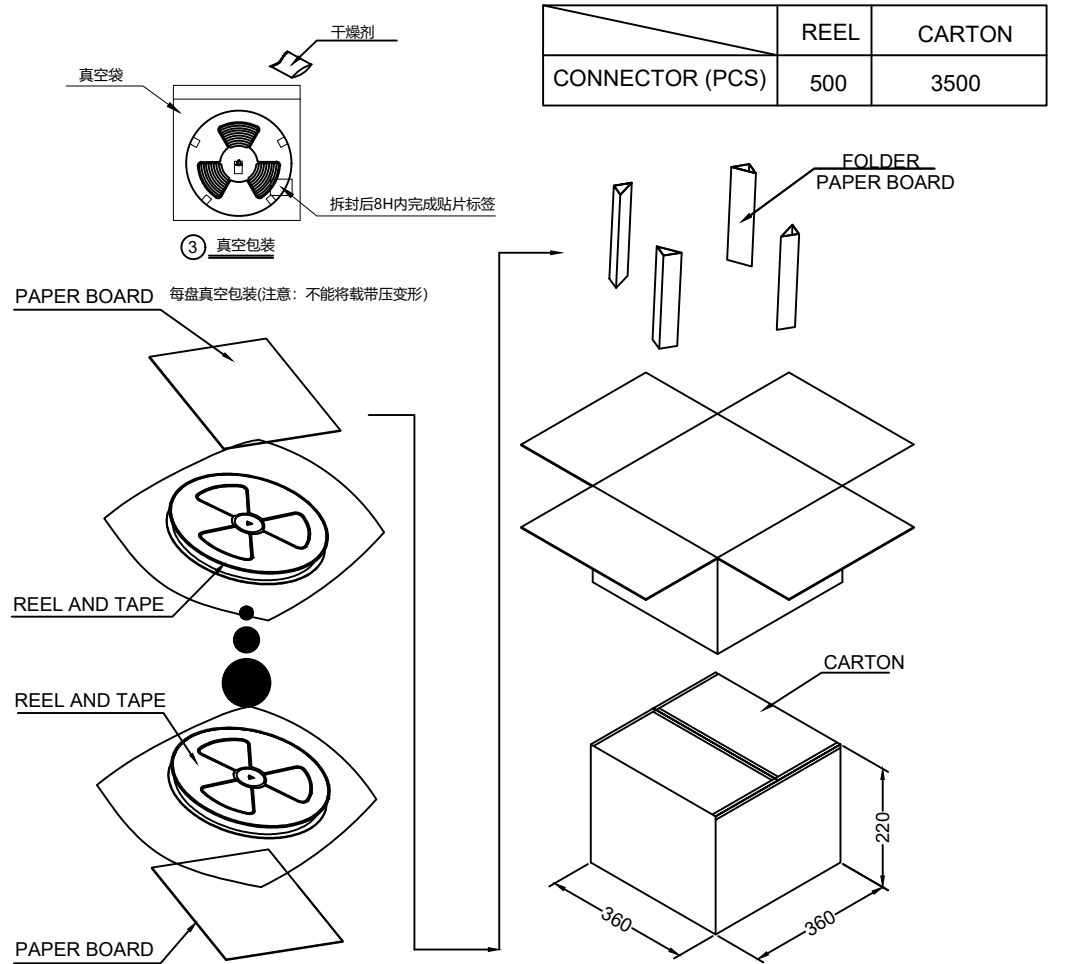

CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd		
UNITS mm	SCALE 1:1	SHEET 2 OF 2			
PROJECTION: 		DRAW: DAP	TITLE 防水TYPE C母座6PIN 立式两脚插板SMT L=6.8 带贴板脚 全塑 IPX7		
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		CHECK: HWT			
		APPD: HHM	MAT'L SEE TABLE		FINISH SEE TABLE
			DWG. NO. A04W0606A		PART NO. _____
					SIZE A4