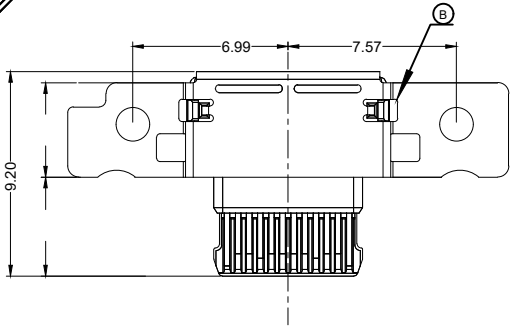
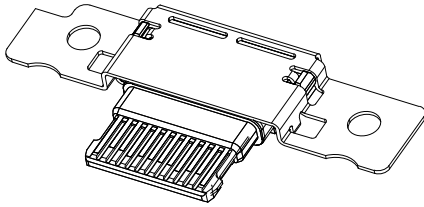
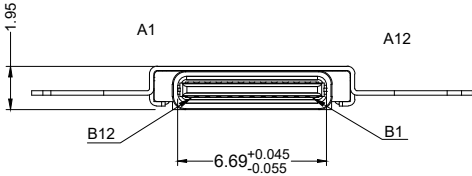
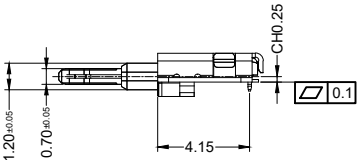
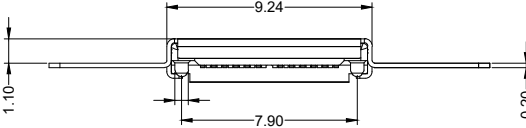
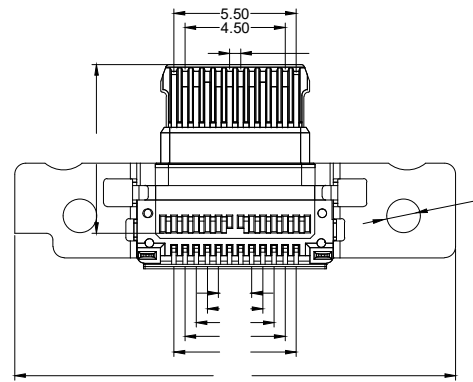
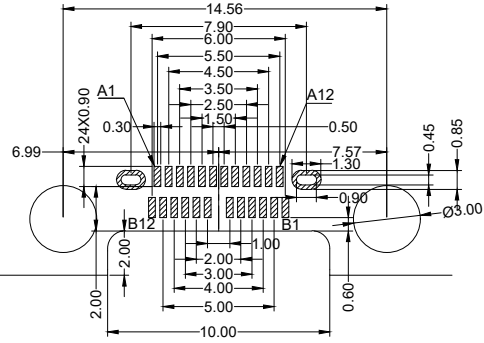


1		2		3		4		5		6			
ROHS Compliant REACH						REV		DESCRIPTION		DATE		APPROVED	
						A		新板发行		2023.05.05		HHM	
								SPECIFICATION:					
								1.CURRENT RATING: 5.0 A					
								2.VOLTAGE RATING: 5.0 V					
								3.VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX					
								SHIELD: 50mΩ /MAX					
								LLCR MAX. CHANGE OF ALL PINS: 10Ω m					
								4.INSULATION RESISTANCE: 100MΩ MIN					
								5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE					
								6.INSERTION FORCE: 0.5~2.0kgf					
								7.UNMATING FORCE: 0.8~2.0kgf					
								8.DURABILITY: 10000 CYCLES					
								9.OPERATING TEMPERATURE: -25° C~+85° C					
								10.THE PEAK TEMPERATURE ON THE BOARO SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C					
												RoHS Compliant 2002/95/EC	
													
				RECOMMENDED PCB LAYOUT T=0.6 TOLERANCE:±0.05									